


# 3117 Radiacord®/DIN

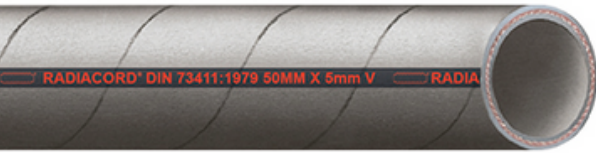

## RADIACORD®/DIN

Radiator and hot water hose

suitable for the most common cooling liquids.

Marking:

 Radiacord® DIN 73411:1979 DN x wall thickness - year / quarter

Norm	EN ISO 1307:2008 DIN 73411 from July 1979
WP	4 bar
BP	12 bar
Min. temperature	-30 °C
Max. temperature	+130 °C
Compound tube	EPDM
Construction tube	Smooth
Color tube	Black
Compound cover	EPDM
Construction cover	Fabric finish
Color cover	Black
Reinforcements	Textile plies

## Description

Art.-no.	Ø Inner mm	Wall mm	Ø Outer mm	Weight/mtr	Length mtr.
3117010000	10	3,5	17	0,160 kg	40
3117013000	13	3,5	20	0,230 kg	40
3117015000	15	3,5	22	0,260 kg	40
3117018000	18	3,5	25	0,300 kg	40
3117020000	20	3,5	27	0,330 kg	40
3117022000	22	3,5	29	0,360 kg	40
3117025000	25	3,5	32	0,400 kg	40
3117028000	28	4,0	36	0,500 kg	40
3117030000	30	4,0	38	0,540 kg	40
3117032000	32	4,0	40	0,580 kg	40
3117035000	35	4,0	43	0,620 kg	40
3117038000	38	5,0	48	0,800 kg	40
3117040000	40	5,0	50	0,900 kg	40
3117042000	42	5,0	52	0,940 kg	40
3117045000	45	5,0	55	1,000 kg	40
3117048000	48	5,0	58	1,060 kg	40
3117050000	50	5,0	60	1,100 kg	40
3117055000	55	5,0	65	1,200 kg	40
3117060000	60	5,0	70	1,300 kg	40
3117065000	65	5,0	75	1,400 kg	40
3117070000	70	5,0	80	1,500 kg	40
3117075000	75	5,0	85	1,600 kg	40
3117080000	80	5,0	90	1,700 kg	40
3117090000	90	6,0	102	2,300 kg	40
3117100000	100	6,0	112	2,500 kg	20
3117110000	110	6,0	122	2,800 kg	20
3117120000	120	7,0	134	3,500 kg	20

**Application:** Suitable for the most common cooling liquids. Also suitable for hot water and cooling water applications.

**Remark:**

- Cutted length possible