TrAle®

unishore
well done

Ball valves AISI 316
2 ways Trale ball valve

2 ways ball valve: tube connector heavy serie TrAle

Stainless Steel AISI 316-L

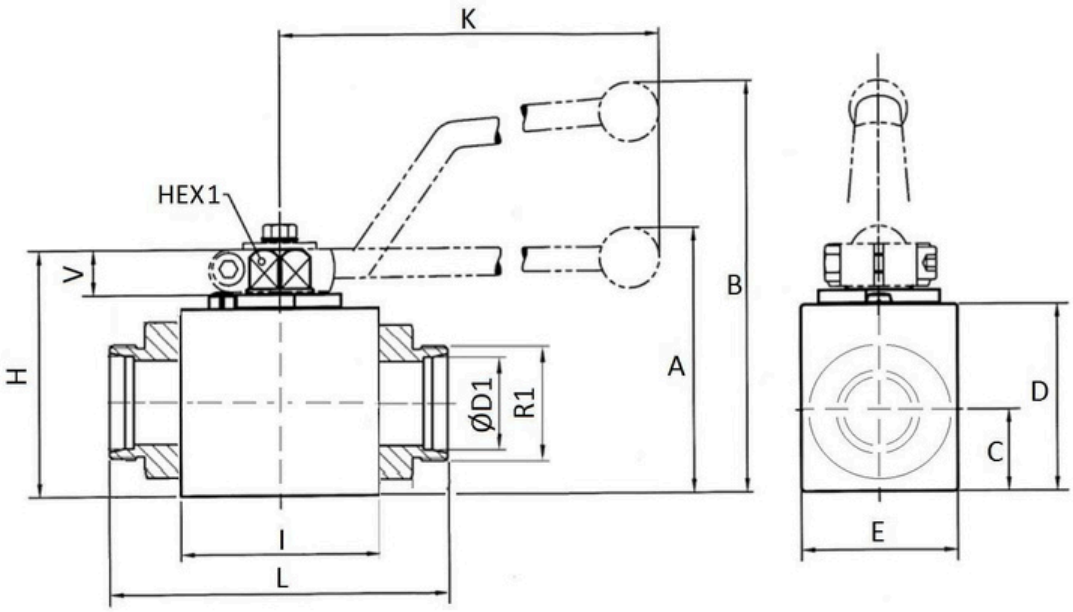

Standard o-ring: NBR
Ball seat: POM (polyoxymethylene)
Handle: Zn
Tmin/Tmax: -20°C/+100°C

Part n°	DN	ØD1	R1	Max. Pressure (bar)	HEX 1	A	B	C	D	E	H	I	K	L	V
ZGB2V 8 S	4	8 S	M16X1.5	500	9	-	82	13,5	33	26	47	40	115	73	11
ZGB2V 10 S	6	10 S	M18X1.5	500	9	-	82	13,5	33	26	47	40	115	73	11
ZGB2V 12 S	8	12 S	M20X1.5	500	9	-	82	13,5	33	26	47	40	115	73	11
ZGB2V 14 S	10	14 S	M22X1.5	500	9	-	86	17,5	38	32	52	43	115	80	11
ZGB2V 16 S	13	16 S	M24X1.5	500	9	-	89	19	40	35	54	48	115	86	11
ZGB2V 20 S	16	20 S	M30X2	500	9	-	89	19	40	35	54	48	115	90	11
ZGB2V 25 S	20	25 S	M36X2	500	14	79	-	24,5	57	49	75	62	200	109	14

The information gathered in this technical documentation has an informative character and can be modified without previous notice. Unishore will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.