


Storm valve - straight

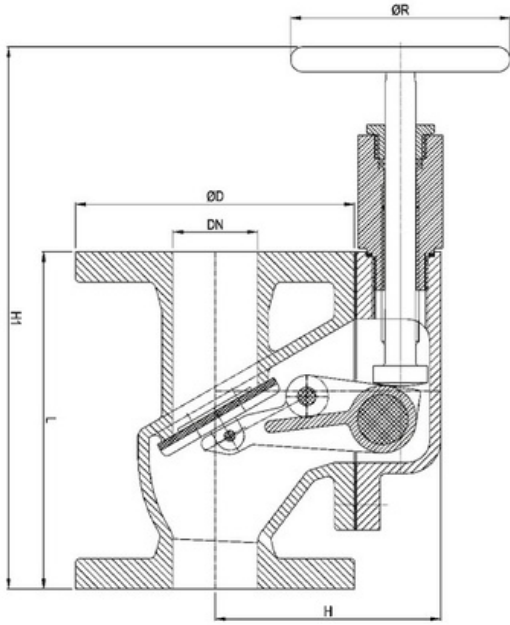

STORM VALVE - STRAIGHT

VERTICAL TYPE NCI / BRONZE DISC
WITH CLOSING DEVICE AND HANDWHEEL

ITEM CODE : **972903** DN50~300 / PN10

MATERIAL SPECIFICATION

Body	GGG40.3	Nodular Cast Iron
Bonnet	GGG40.3	Nodular Cast Iron
Disc with sealing	RG5 + NBR	Bronze + Nitrile
Bonnet gasket	NBR	Rubber Nitrile Rubber
Bolts	A2	Steel
Plug	Ms58	Brass

DIMENSIONS

DN	ØD (mm)	PCD (mm)	N°holes (mm)	L (mm)	H (mm)	H1 (mm)	ØR (mm)	Weight (kg)
50	165	125	4xØ18	200	140	310	140	16
65	185	145	4xØ18	240	150	350	140	22
80	200	160	8xØ18	260	185	390	140	27
100	220	180	8xØ18	300	200	435	140	35
125	250	210	8xØ18	350	220	495	160	50
150	285	240	8xØ22	400	245	530	160	67
200	340	295	8xØ22	500	315	625	160	101
250	395	350	12xØ22	600	400	750	200	150
300	445	400	12xØ22	700	400	900	200	240

APPLICATION

Mainly installed in sanitary piping systems which have a ship's side exit.

TECHNICAL FEATURES

Design	DIN 87101 Form B - with closing device and handwheel
Face to Face	EN 558 Series 48 (DIN 3202 F6))
Temperature range	-10°C ~ +60°C
Pressure rating	PN4

- Storm valves with flat faced DIN flanges and NBR vulcanized disc and closing device with handwheel, prevents seawater entering this system during heavy sea.

PRESSURE & TEMPERATURE RANGES

BORE	PRESS.RATING	Hydro test press.[bar]	
		CASING	CLOSURE
DN50~250	PN4	6	4.4