


## MARPOL flange dirty oil

Available in steel (S235) and stainless steel (1.4301) with 6 slotted holes.

On stock in flat welding flanges and blind flange.

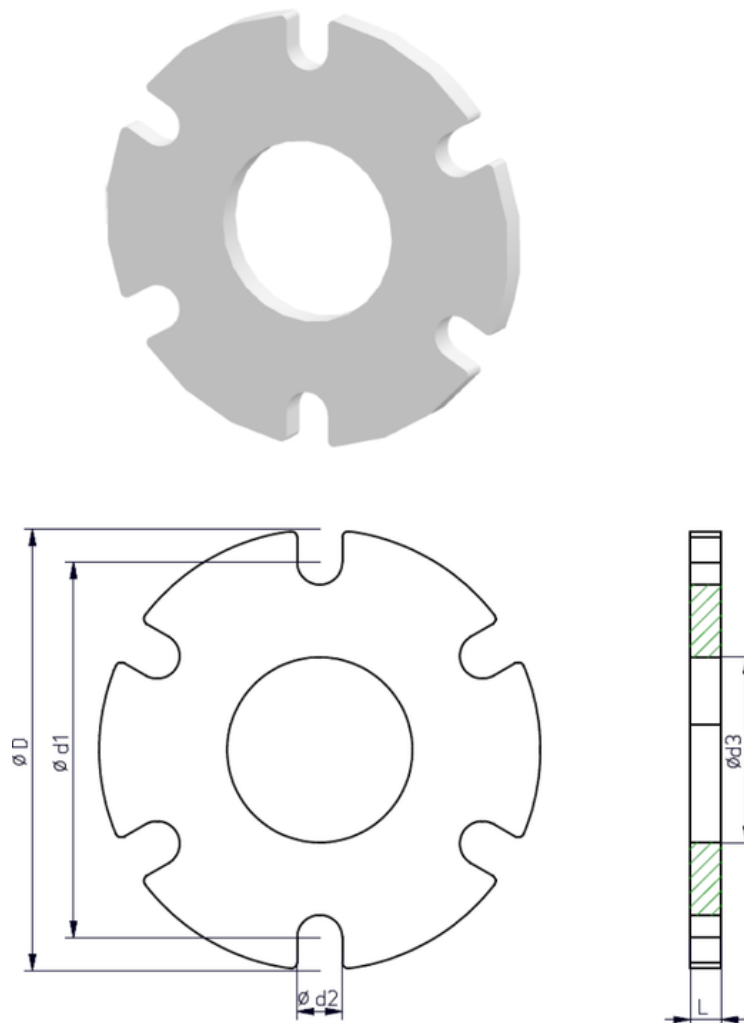


| DN  | Pressure rating | L  | D   | D1  | D2 | D3    | KG  |
|-----|-----------------|----|-----|-----|----|-------|-----|
| 40  | PN 6            | 20 | 215 | 183 | 22 | 49,0  | 4,9 |
| 50  | PN 6            | 20 | 215 | 183 | 22 | 61,1  | 4,8 |
| 65  | PN 6            | 20 | 215 | 183 | 22 | 77,1  | 4,5 |
| 80  | PN 6            | 20 | 215 | 183 | 22 | 90,3  | 4,2 |
| 100 | PN 6            | 20 | 215 | 183 | 22 | 115,9 | 3,6 |
| 125 | PN 6            | 20 | 215 | 183 | 22 | 141,6 | 2,8 |

## MARPOL flange seawater

Available in steel (S235) and stainless steel (1.4301) with 4 slotted holes.

**On stock in flat welding flanges and blind flange.**

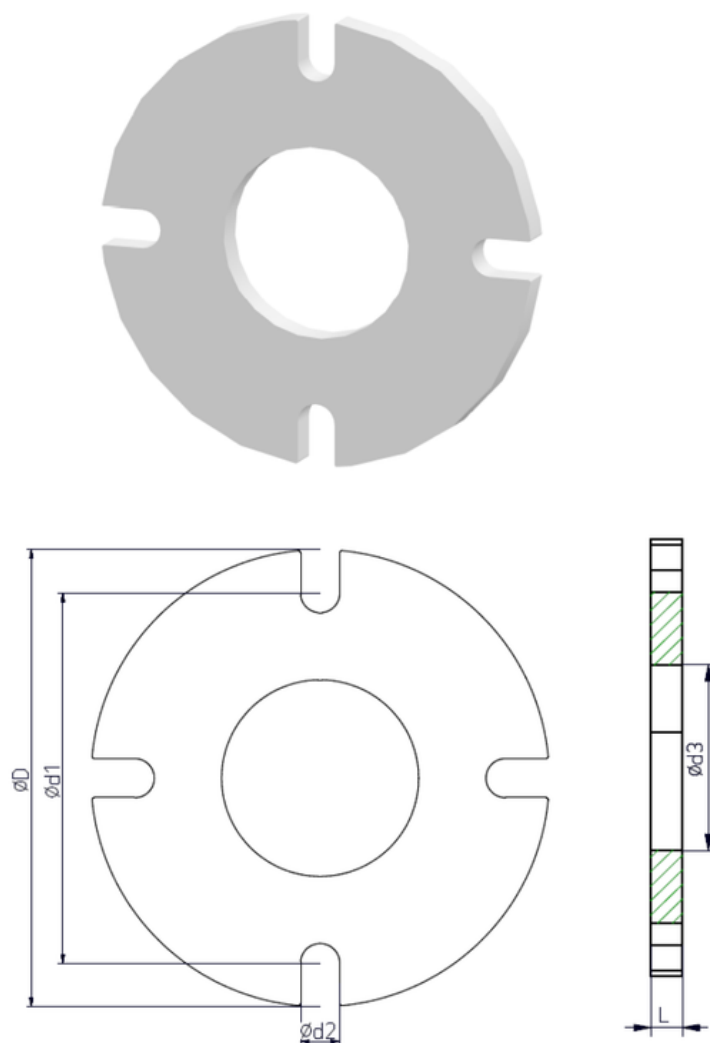

| DN  | Pressure rating | L  | D   | D1  | D2 | D3    | KG  |
|-----|-----------------|----|-----|-----|----|-------|-----|
| 32  | PN 6            | 15 | 210 | 170 | 18 | 43,1  | 4,0 |
| 40  | PN 6            | 15 | 210 | 170 | 18 | 49,0  | 3,9 |
| 50  | PN 6            | 15 | 210 | 170 | 18 | 61,1  | 3,8 |
| 65  | PN 6            | 15 | 210 | 170 | 18 | 77,1  | 3,6 |
| 80  | PN 6            | 15 | 210 | 170 | 18 | 90,3  | 3,3 |
| 100 | PN 6            | 15 | 210 | 170 | 18 | 115,9 | 2,9 |