DIN 2353 Pipe fittings
Straight couplings

Equal cross

Stainless Steel AISI 316-L

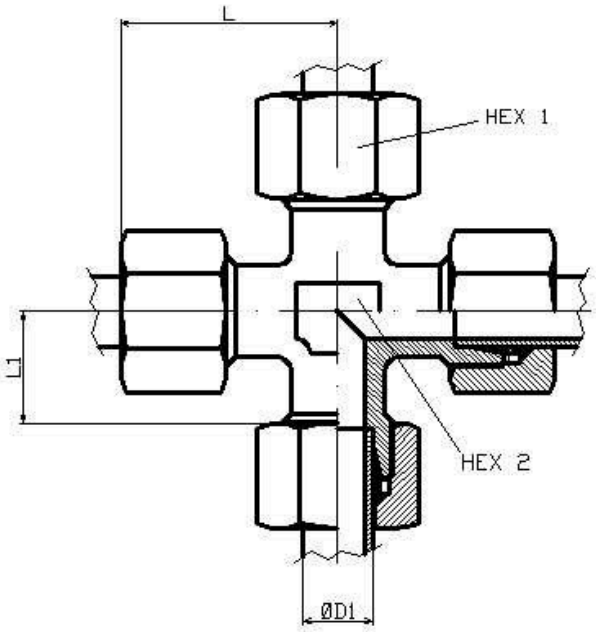

Part n°	ØD1	Serie	Working Pressure (bar)	L	L1	HEX 1	HEX 2
Z KVL 6	6	L	315	27,0	12	14	12
Z KVL 8	8	L	315	29,0	14	17	12
Z KVL 10	10	L	315	30,0	15	19	14
Z KVL 12	12	L	315	32,0	17	22	17
Z KVL 15	15	L	315	36,0	21	27	19
Z KVL 18	18	L	315	40,0	23,5	32	24
Z KVL 22	22	L	160	44,0	27,5	36	27
Z KVL 28	28	L	160	47,0	30,5	41	36
Z KVL 35	35	L	160	56,0	34,5	50	41
Z KVL 42	42	L	160	63,0	40	60	50
Z KVS 6	6	S	630	31,0	16	17	12
Z KVS 8	8	S	630	32,0	17	19	14
Z KVS 10	10	S	630	34,0	17,5	22	17
Z KVS 12	12	S	630	38,0	21,5	24	17
Z KVS 14	14	S	630	40,0	22	27	19
Z KVS 16	16	S	400	43,0	24,5	30	24
Z KVS 20	20	S	400	48,0	26,5	36	27
Z KVS 25	25	S	400	54,0	30	46	36
Z KVS 30	30	S	400	62,0	35,5	50	41
Z KVS 38	38	S	315	72,0	41	60	50

The information gathered in this technical documentation has an informative character and can be modified without previous notice. Unishore will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.